




LED Driver 6W CV/CC Mode 定電壓/定電流 Series

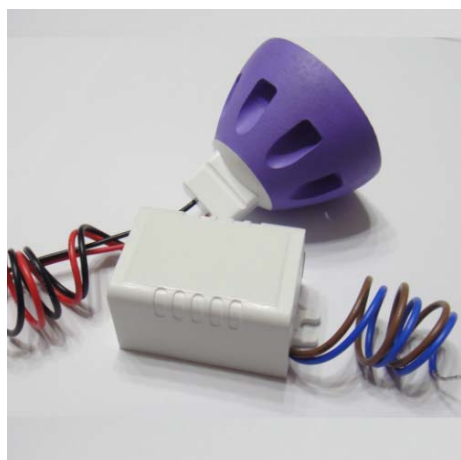

Features

- Universal Input Range 90 to 264 VAC
- DC Output with Constant Voltage & Current
- Input Current :0.15A/110VAC 0.08A/220VAC
- Efficiency: >70%(110Vac 100% FULL LOAD)
- PFC: PF \geq 0.50 110VAC / PF \geq 0.48 220VAC
- Ripple and Noise < 2V p-p
- Protection: SCP
- Operation Ambient Temperature: -20 $^{\circ}$ C ~ 50 $^{\circ}$ C
- Operation Relative Humidity: 10% ~ 95%.

Case Size : L40mmxW 27mmxH23mm

Constant Current 定電流

AC INRUSH CURRENT	MODEL NO.	Output Voltage	Constant Current Range
90Vac~264Vac	ALN-1014-0500	10~14V	0.50A
90Vac~264Vac	ALN-1215-0450	12~15V	0.45A
90Vac~264Vac	ALN-1316-0400	12~16V	0.40A
90Vac~264Vac	ALN-1618-0350	16~18V	0.35A

Constant Voltage 定電壓

AC INRUSH CURRENT	MODEL NO.	Output Voltage	Constant Current Range
90Vac~264Vac	ALN-05-1000	5V \pm 5%	1.0A
90Vac~264Vac	ALN-06-1000	6V \pm 5%	1.0A
90Vac~264Vac	ALN-07-0860	7V \pm 5%	0.86A
90Vac~264Vac	ALN-09-0670	9V \pm 5%	0.67A
90Vac~264Vac	ALN-10-0600	10V \pm 5%	0.60A
90Vac~264Vac	ALN-12-0500	12V \pm 5%	0.50A
90Vac~264Vac	ALN-15-0400	15V \pm 5%	0.40A
90Vac~264Vac	ALN-18-0330	18V \pm 5%	0.33A
90Vac~264Vac	ALN-24-0250	24V \pm 5%	0.25A