



Features

- CEC Compliance
- RoHS Compliance
- Over Voltage Protective Installation
- Short Circuit Protective Installation
- Protection Type: Auto Recovery
- MTBF > 30,000 hours

EM1024 x R - vv PP

x: Output range

Y: AC plug type: Interchangeable

• U: USA • C: China • E: EU • K: UK • A: SAA • S: South Africa

vv: Specified output voltage, ie 12 is 12Vdc.

PP: Connector type, ie 01 for EDACPOWER standard dc cable or please refer to the appendix page

Electrical Specifications

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EM1024AR	16	5~8V	0A	2.0A	± 5%	± 1%	100mV
EM1024BR	20	5~8V	0A	3.0A	± 5%	± 1%	100mV
EM1024CR	24	5~8V	0A	4.0A	± 5%	± 1%	100mV
EM1024DR	18	9~11V	0A	1.5A	± 5%	± 1%	250mV
EM1024ER	24	9~11V	0A	2.0A	± 5%	± 1%	250mV
EM1024FR	27	9~11V	0A	3.0A	± 5%	± 1%	250mV
EM1024GR	20	12~17V	0A	1.66A	± 5%	± 1%	250mV
EM1024HR	30	12~17V	0A	2.5A	± 5%	± 1%	250mV
EM1024JR	24	18~24V	0A	1.33A	± 5%	± 1%	350mV
EM1024KR	30	18~24V	0A	1.66A	± 5%	± 1%	350mV
EM1024MR	20	36~48V	0A	0.55A	± 5%	± 1%	480mV
EM1024NR	30	36~48V	0A	0.83A	± 5%	± 1%	480mV
EM1024PR	36	12V	0A	3.0A	± 5%	± 1%	250mV
EM1024QR	24	12V	0A	2.0A	± 5%	± 1%	250mV
EM1024RR	36	24V	0A	1.5A	± 5%	± 1%	350mV

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
- 3 : Max. Power (W) = Vo x Io

Electrical Specifications

INPUT

- Input Range: 100 to 240VAC
- Frequency: 50 to 60Hz
- Input Current: 1.0A~0.5A
- Inrush Current: ≤60A At cold start
- Efficiency: Meet CEC Level V, VI
- Hold Up Time: ≥8.3mS
- Turn On Time: ≤3S

OUTPUT

- Over Voltage Protection: Auto Recovery
- Short Circuit Protection: Auto Recovery


ENVIRONMENTAL

- Operating Temperature: 0 to 40°C
- Storage Temperature: -20 to 85°C
- Operating Humidity: 10% to 90%
- Storage Humidity: 5% to 95%

SAFETY

- UL/cUL UL60601, TUV/SUD EN/IEC 60601 CB, CE, FCC, CCC

Mechanical Specification

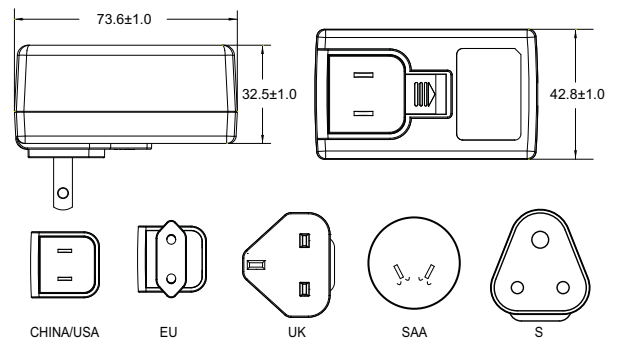

- Case Size: 73.6L x 42.8W x 32.5H (mm)
- AC Inlet: U: USA, C: China, E: EU, K: UK, A: SAA, S: South Africa
- Weight: 200g